



v6 POS



IP54 Whole Unit



Fanless & Screwless



2 x Removable M.2 SSD

SEÑOR

SENROR v6POS Series Touch POS Terminal


Senor v6POS series feature a brand new concept with an ultra-narrow bezel-less screen and sleek exterior design, with coloured frame and casing to match the retailer's style.



v6POS is an **energy-efficient solution** with low power consumption on a high-performing platform. The CPU consumes less power, generates less heat and helps to keep our environment green.

With its **elegant design**, v6POS is ideally suited for the retail and hospitality industries' flagship and pop-up stores.

I/O Connector



v6POS Standard Type

3 x Serial | 1 x LAN | 6 x USB
1 x Cash Drawer | 1 x HDMI


Optional Accessories



Wireless LAN



9.7" / 15" Customer Display

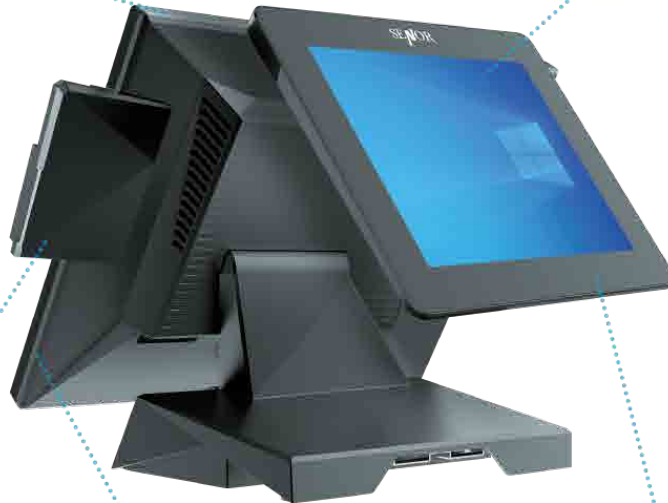

Upward* / Downward Customer Display



MSR / Fingerprint / RFID Reader



Coloured Frame* / Housing*



VFD Customer Display

Features



90 Degree Panel Tilt



Internal Power Supply Cable Management System



Fanless / Screwless

* Coloured units & upward customer display are by special order only.



SPECIFICATIONS

	v6POS T515	v6POS T715
PROCESSOR	Intel Core i5-1235U 1.3 GHz (Turbo Boost up to 4.4 GHz)	Intel Core i7-1255U 1.7 GHz (Turbo Boost up to 4.7 GHz)
SYSTEM MEMORY	8 GB DDR4 RAM (up to 64 GB)	8 GB DDR4 RAM (up to 64 GB)
STORAGE DEVICE	1 x 128 GB removable M.2 PCIe 2280 SSD 1 x 128 GB M.2 PCIe 2280 expansion socket (supports RAID 0/1/5/10)	

DISPLAY

SIZE / RESOLUTION	15" TFT LCD (LED backlight) / 1024 x 768 pixels
BRIGHTNESS	350 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch (multi-touch)

I/O INTERFACE (STANDARD)

USB PORT	6 x USB 2.0 1 x USB 3.0 (front panel)
SERIAL PORT	3 x RJ50
VIDEO PORT	1 x HDMI 1.4
AUDIO PORT	2 x built-in speakers 1 x 3.5 mm Mic-in/Line-out
CASH DRAWER PORT	1 x RJ11 (24 V)
ETHERNET PORT	1 x RJ45 10/100/1000 Mbps (up to 2 x Ethernet ports)

OPERATING SYSTEM

WINDOWS	10 IoT / 10 Pro / 11 IoT / 11 Pro
---------	-----------------------------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	366 (W) x 290 (H) x 193 (D) mm 7.8 kg
CHASSIS MATERIAL	Die-cast aluminium
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	Operating: 0% to 80% Storage: 10% to 90% (non-condensing)
POWER CONSUMPTION	12 V / 6 A, internal power adapter, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED READERS	3-track MSR, RFID (125 kHz / 13.56 MHz), Fingerprint reader, 2D barcode reader
CUSTOMER DISPLAY	2-line VFD or 9.7" / 15" TFT LCD (optional touch)
WIRELESS LAN	Integrated 802.11 b/g/n/ac + Bluetooth 4.1
COLOURED FRAME	Black (standard) White/Red/Green/Blue/Purple (special order)
COLOURED UNIT	Black (standard) Gold/Silver (special order)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au

SENIOR
TOUCH SCREEN SOLUTIONS

Quality. Safety. Versatility.